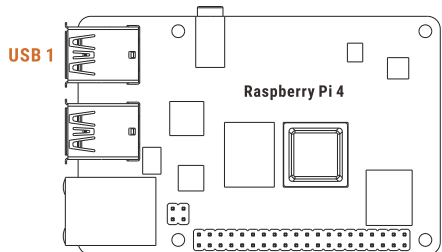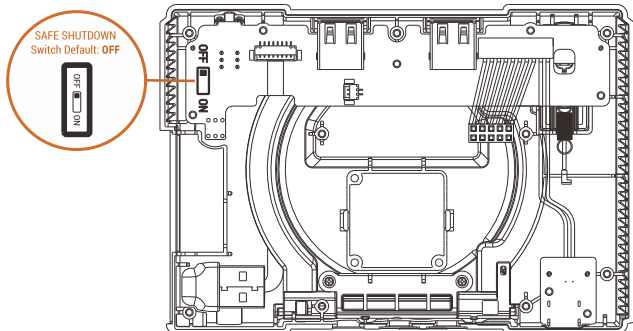**!** Please be careful when handling the parts.
! It is not our responsibility for any damage caused in use.
Waining: Please make sure there is NO MicroSD inserted before assembling.

Step 1: Install safe shutdown script

USB 1

Raspberry Pi 4

Safe Shutdown Scripts:
https://github.com/RetroFlag/retroflag-picase

SAFE SHUTDOWN
Switch Default: **OFF**

OFF
ON

Step 2: Assemble

[A]
[PB 2.0×5] * 3

[B]
[PB 2.0×7] * 6

[Screwdriver] * 1

① USB 1

②

③
[A]

④
[B]

Compatible with Raspberry Pi 4
PiStation
MODEL:PICASE
MADE IN CHINA
RETROFLAG TECH CORP.
WWW.RETROFLAG.COM

⑤

⑥
DC IN
HDMI OUT

⑦
DC IN
HDMI OUT

5V ⎓ 3A

⑧
VOLUME
4:3/16:9 SWITCH
BRIGHTNESS
RESET
POWER
Micro SD Storege
OPEN
1 2

RETROFLAG